



TH₃ERMO


Bottom View





Front View

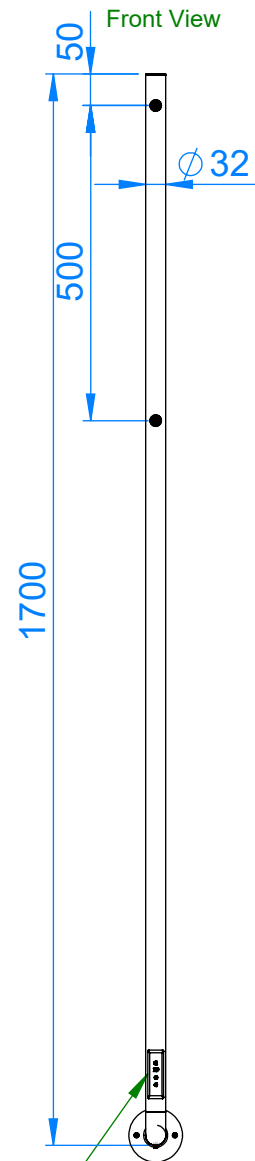


Left View




Back View

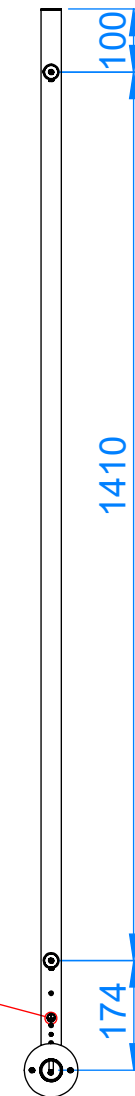


DETAIL B
SCALE 1 : 1

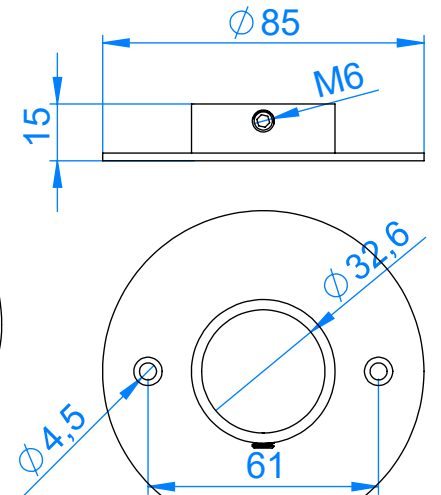

1 PCS.
Ø85 X 15 mm S.STEEL MOUNTING FLANGE

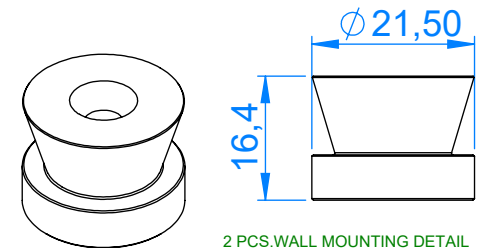

2 PCS.WALL MOUNTING DETAIL
MATERIAL ALUMINIUM 6063 T5

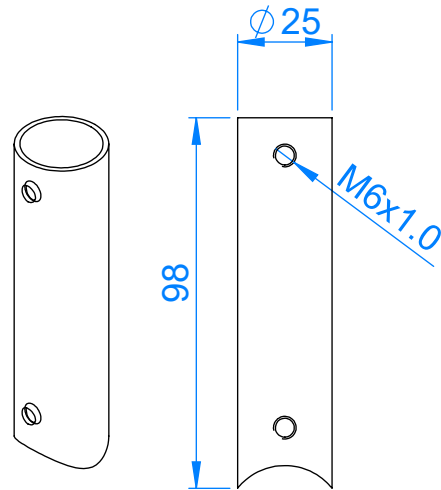

2PCS.
Ø25 X 98 MM S.STEEL DOUBLE
GRUB SCREW MOUNTING LEG


Timer with thermostat

(P)
(N)
(SL)

Power : 54 Watt (18 W/m Dry Cable Heater)
Voltage : 230V AC 50-60 Hz



NAME -SURNAME	DATE	SIGN	QUANTITY	WEIGHT (KG)	PAGE NR
			1		1/1
MATERIAL	STOK KODU STOCK CODE				
Stainless Steel					
SCALE	1:1				
DRAWING NO	FORMAT				
	A3				

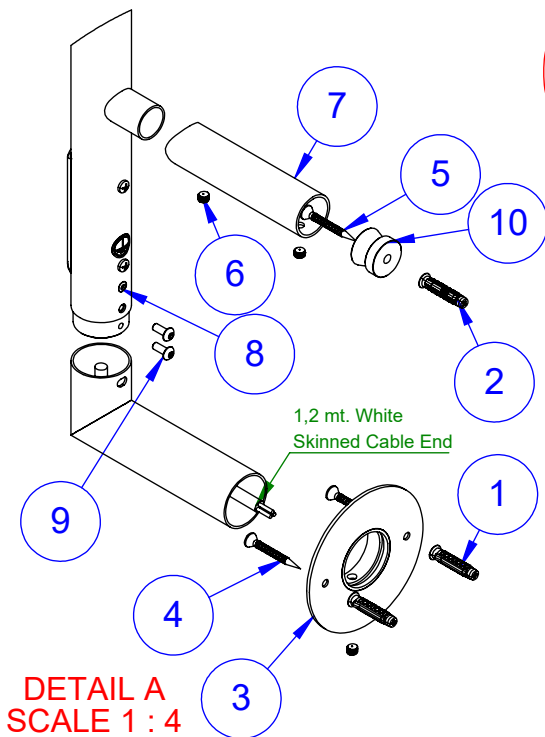

DETAIL A
SCALE 1 : 4

POS	COMPONENT	QTY.
1	WALL PLUG 6 X 30 mm	2
2	WALL PLUG 8 X 40 mm	2
3	Ø85 X 15 mm S.STEEL MOUNTING FLANGE	1
4	3,8 X 38 mm CROSSHEAD SCREW	2
5	4,8 X 60 mm CROSSHEAD SCREW	2
6	M6 SET SCREW	5
7	Ø25 X 98 mm S.STEEL DOUBLE GRUB SCREW MOUNTING LEG	2
8	STAINLESS POP RIVET 3X6	1
9	M4 IMBUS BOLT	2
10	MOUNTING BRACKET ALUMINIUM	2